


JUL 25 2000 04 SEP 2001

FORM PTO-1399 OFFICE (REV. 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK		ATTORNEY'S DOCKET NUMBER	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				7502M	
				U.S. APPLICATION NO. (if known, see 37 CFR 1.5)	
INTERNATIONAL APPLICATION NO. PCT/US00/09411		INTERNATIONAL FILING DATE 07 April 2000		PRIORITY DATE CLAIMED 08 April 1999	
TITLE OF INVENTION Absorbent Article With Improved Combination Of Skin Feel, and Fluid Handling					
APPLICANT(S) FOR DO/EO/US WALKER, Richard III et al.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).</p> <p>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application was filed (35 U.S.C. 371(c)(2))</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> has been transmitted by the International Bureau.</p> <p style="margin-left: 20px;">c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> have been transmitted by the International Bureau.</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p style="margin-left: 20px;">d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11. to 16. below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p style="margin-left: 20px;"><input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>14. <input type="checkbox"/> A substitute specification.</p> <p>15. <input checked="" type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>16. <input type="checkbox"/> Other items or information:</p>					
<p>"Express Mail" mailing label number <u>EL 483620907715</u></p> <p>Date of Deposit <u>04 Sep. 2001</u></p> <p>I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: The Assistant Commissioner of Patents, Washington, D.C. 20231</p> <p>Administrative Mailing Application</p> <p>Signature <u>Angela C. Byrd</u></p>					

09/14/2001 14:54:00

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER	
09/914861		PCT/US00/09411		7502M	
				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$710	
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	15-20 =	0	x \$18.00	\$0	
Independent Claims	5-3 =	2	x \$80.00	\$160	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			\$270.00	\$0	
TOTAL OF ABOVE CALCULATIONS =				\$870	
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$0	
TOTAL NATIONAL FEE =				\$870	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28,3.31). \$40.00 per property +				\$0	
TOTAL FEES ENCLOSED =				\$870	
				Amount to be refunded	\$
				charged	\$
<p>a. [] A check in the amount of \$ ____ to cover the above fees is enclosed.</p> <p>b. [x] Please charge my Deposit Account No. <u>16-2480</u> in the amount of \$ <u>870</u> to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>16-2480</u>. A duplicate copy of this sheet is enclosed.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p>					
T. P. Cummings, Patent Agent Customer Number 27749			 Signature <u>T. David Reed</u> Name <u>32,931</u> Registration Number		

09/14/95 10:00:00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the Matter of:

U.S. National Phase Entry

Under 35 USC § 371 from

the International Application of

WALKER, Richard III

Int'l Application No. PCT/US00/09411

Filed in the RO/US on 07 April 2000

Entitled:	Absorbent Article With Improved Combination of Skin Feel and Fluid Handling
-----------	--

PRELIMINARY AMENDMENT UNDER 37 CFR § 1.112

Assistant Commissioner for Patents

Washington, D.C. 20231

Dear Sir:

Prior to Examination and computation of the fees for entering the captioned International Application into the U.S. National Phase, please preliminarily amend the above-identified application as follows and consider the following Remarks.

AMENDMENTS

IN THE CLAIMS

Please amend Claims as follows:

6. (Amended) An absorbent article according to Claim 5 wherein said at least a portion of said absorbent core has a mean absorption pressure of greater than about 7 cm.
8. (Amended) An absorbent article according to Claim 1 wherein said topsheet comprises a formed thermoplastic film materials having a plurality of macroapertures and a multiplicity of microapertures wherein land area between the microapertures and the macroapertures is also provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the formed film.

9. (Amended) An absorbent article according to Claim 7 wherein said topsheet comprises a nonwoven materials having depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
10. (Amended) An absorbent article according to Claim 7 wherein said topsheet comprises a laminate of a nonwoven material and a formed apertured thermoplastic film, the nonwoven material having depositions of a low surface energy material on the surface thereof that is opposite to the surface joined to the thermoplastic film for forming the laminate, wherein the low surface energy material creates a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
11. (Amended) An absorbent article according to Claim 1 wherein said absorbent core comprises a polymeric foam formed from a high internal phase emulsion.
12. (Amended) An absorbent article according to Claim 10 wherein said absorbent core comprises a blend of chemically stiffened, twisted, and curled bulking fibers, high surface area fibers, and thermoplastic binding fibers.
13. (Amended) An absorbent article according to Claim 10 wherein said absorbent core comprises an airlaid fibrous web comprising a substantially uniform admixture of hardwood fibers and softwood fibers.
14. (Amended) An absorbent article according to Claim 13 wherein said core further comprises superabsorbent particles.
15. (Amended) An absorbent article according to Claim 1 wherein said absorbent article further comprises an acquisition component that is pattern bonded to said topsheet so as to create an unbonded window, wherein said acquisition component is disposed between said topsheet and said absorbent core and said absorbent core comprises a multi-bonded air laid nonwoven material comprising a blend of cellulose fibers, bi-component fibers, superabsorbent particles, and latex binder.

[illegible]

The support for these amendments is found in the claims as originally filed. These amendments are being entered to bring the claims into conformance with, *inter alia*, 37 CFR §1.75; no new matter is added.

By Mr. [Signature]

T. David Reed
Agent for Applicants
Registration No. 32,931

29 August 2001
5299 Spring Grove Avenue
Cincinnati, Ohio 45217-1087
Phone: (513) 627-7025
FAX: (513) 627-6333

09/914861
JC03 Rec'd PCT. TO 04 SEP 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the claims:

09/914861

09/914861
JC03 Rec'd PCT TO 04 SEP 2001

What is claimed is:

1. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:
 - a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a compressibility of less than about 488 g/cubic cm;
 - a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and
 - an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;wherein said topsheet and said core cooperate to provide said absorbent article with a liquid strikethrough of less than about 55 seconds and a wetback of less than 30 milligrams.
2. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:
 - a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a compressibility of less than about 488 g/cubic cm;
 - a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and
 - an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;wherein said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.
3. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:
 - a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet,;
 - a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said absorbent article has a panel softness between about 30 and about 60 PSU and said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

4. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a Surface Density of less than about 0.035 grams per cubic centimeter;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

5. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said topsheet has a panel softness between about 30 and about 60 PSU and said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

6. An absorbent article according to any of CLAIM 5 1 to 5 wherein said at least a portion of said absorbent core has a mean absorption pressure of greater than about 7 cm.

7. An absorbent article according to Claim 6 wherein said absorbent core has a mean absorption pressure between about 7 cm and about 25 cm.
8. An absorbent article according to ^{CLAIM 1} [any of the above claims] wherein said topsheet comprises a formed thermoplastic film materials having a plurality of macroapertures and a multiplicity of microapertures wherein land area between the microapertures and the macroapertures is also provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the formed film.
9. An absorbent article according to ^{CLAIM 7} [any of Claims 1 to 7] wherein said topsheet comprises a nonwoven materials having depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
10. An absorbent article according to ^{CLAIM 7} [any of Claims 1 to 7] wherein said topsheet comprises a laminate of a nonwoven material and a formed apertured thermoplastic film, the nonwoven material having depositions of a low surface energy material on the surface thereof that is opposite to the surface joined to the thermoplastic film for forming the laminate, wherein the low surface energy material creates a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
11. An absorbent article according to ^{CLAIM 1} [any of the above claims] wherein said absorbent core comprises a polymeric foam formed from a high internal phase emulsion.
12. An absorbent article according to ^{CLAIM 10} [any of Claims 1 to 10] wherein said absorbent core comprises a blend of chemically stiffened, twisted, and curled bulking fibers, high surface area fibers, and thermoplastic binding fibers.
13. An absorbent article according to ^{CLAIM 10} [any of Claims 1 to 10] wherein said absorbent core comprises an airlaid fibrous web comprising a substantially uniform admixture of hardwood fibers and softwood fibers.
14. An absorbent article according to ^{CLAIM 13} [Claims 12 or 13] wherein said core further comprises superabsorbent particles.
15. An absorbent article according to ^{CLAIM 1} [any of the above claims] wherein said absorbent article further comprises an acquisition component that is pattern bonded to said topsheet so as to create an unbonded window, wherein said acquisition component is disposed between said

topsheet and said absorbent core and said absorbent core comprises a multi-bonded air laid nonwoven material comprising a blend of cellulose fibers, bi-component fibers, superabsorbent particles, and latex binder.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218

ABSORBENT ARTICLE WITH IMPROVED COMBINATION OF
SKIN FEEL AND FLUID HANDLING

This is a continuation-in-part of application Serial No. 60/128,267, filed in the name of Walker, et al. on April 8, 1999, pending, which is a continuation-in-part of application Serial No. 08/832,715, filed in the name of Ouelette, et al. on April 11, 1997, pending, which is a continuation of application Serial No. 08/442,935, filed on May 31, 1995, abandoned, which is a continuation-in-part of application Serial No. 08/326,571, filed on October 20, 1994, abandoned, which is a continuation-in-part of application Serial No. 08/268,404, filed on June 30, 1994, abandoned.

FIELD OF THE INVENTION

The present invention relates to absorbent articles such as sanitary napkins, panty liners, diapers, adult incontinence pads and briefs, and the like having an improved combination of skin feel and fluid handling properties, such as fluid acquisition and retention.

BACKGROUND OF THE INVENTION

Absorbent articles such as diapers, sanitary napkins, panty liners, incontinence pads and briefs, tampons, and the like are well known and widely used to absorb bodily exudates such as urine, feces, and menses. Typical disposable absorbent articles often comprise a liquid pervious body side liner and an underlying absorbent core. The absorbent core may be sandwiched between the body side liner and a liquid impervious backsheet, which backsheet serves to protect garments and skin from contact with absorbed bodily discharges. Typically body side liners may comprise a topsheet such as an apertured formed film or a nonwoven topsheet layer. A body side liner may also comprise a multiple layer structure such as a topsheet in liquid communication with a secondary topsheet (which is also sometimes referred to as a distribution layer, surge management layer, wicking layer, or similar term).

In order to meet the fluid handling needs of a user, such absorbent articles need to rapidly remove deposited bodily exudates from the body-contacting surface of the absorbent article (acquisition) and retain such acquired fluids away from the body surface (retention or rewet prevention). Typically, the fluid handling performance of an absorbent article represents a balance between acquisition requirements and fluid retention requirements (rewet prevention). In general, the properties of the core and the topsheet interact to determine the balance.

Users of absorbent articles have other needs that also must be met to the greatest degree possible. For example, the body-contacting surface of the absorbent article should be as skin friendly as possible. Skin friendliness includes properties such as softness, compressibility, not retaining fluid adjacent to the skin, contains no irritating components, not occluding the skin so as to cause a hot, sweaty feel. For users of catamenial products, it is also important that menses that has been absorbed by the core be hidden from view as much as possible (masking). Properties of this type, while there is some performance requirement for the core, depend more on the performance of the topsheet.

The core of the typical absorbent article described above has two basic requirements: to drain the topsheet of deposited fluids and draw these fluids into the absorbent core for storage, and to resist subsequent release of previously absorbed fluid as a result of pressure exerted on the core or article as a whole (i.e. avoid "squeeze out" of the core which can cause rewet of the body surface). Other considerations, such as the overall capacity of the absorbent core, its thickness, and its stiffness are also important with respect to the design of superior absorbent articles.

A wide variety of fibrous web structures suitable for use as core components are known in the art, and many of these have attempted to provide high capillary pressure and other desirable properties. For example, US Patents 5,009,650 and 4,699,619 both issued to Bernardin. The Bernardin devices incorporate a layer of primarily softwood pulp fiber overlaying a layer of primarily hardwood pulp fiber. The Bernardin device, however, does not achieve the benefits of high capillary pressure and fluid retention demonstrated by the present invention. Additionally, the Bernardin device fails to incorporate superabsorbent particles throughout the layer. The use of bicomponent fibers for improved retention properties is also not described.

The topsheet of absorbent articles preferably allows deposited fluids to quickly penetrate the surface thereof (i.e. the topsheet should exhibit high liquid strike-through). Additionally, once fluids penetrate the topsheet, they should not flow back to the surface of the liner (i.e. the topsheet should inhibit rewet). Preferred topsheets are also as soft, comfortable, and as non-irritating to the skin of the user as possible.

The art has continually attempted to improve topsheet properties to address such needs. For example, one prior art approach has been to utilize a topsheet which comprises a web of formed, apertured thermoplastic film. Commonly assigned US Patent 4,342,314, issued to Radel et al. on August 3, 1982, the disclosure of which is hereby incorporated herein by reference, discloses a representative formed film of this variety. Such webs utilize capillary fluid transport to conduct fluid away from one surface (wearer-contacting) into and through the web via three-dimensional capillaries formed in the material, and then into the underlying absorbent structure. In order to address consumer concerns with regard to plastic-like appearance and feel, apertured, formed thermoplastic film webs have been developed which further include microscopic surface texturing (microtexture) and/or microscopic apertures (microapertures) to further enhance the visual and tactile impression of such webs. Representative film webs of this variety are disclosed in commonly assigned US Patents 4,463,045, issued to Ahr et al. on July 31, 1984, and 4,629,643, issued December 16, 1986 to Curro et al., the disclosures of which are hereby incorporated herein by reference. While such formed film topsheets have enjoyed wide commercial success, many users still perceive them as being plastic-like and not particularly soft.

Another prior art approach is the use of nonwoven webs as a topsheet material. For example, nonwoven materials said to have desirable skin feel benefits compared to the aforementioned formed film topsheet materials are described in laid open Japanese Patent Application 7-119012, published in the name of Kao Corp. on May 9, 1995. While the fibrous nature of such nonwoven topsheets may have some desirable skin feel benefits, nonwoven materials are widely known to be deficient in preventing rewet.

One approach to combining the benefits of formed film materials and nonwoven materials has been to utilize a fibrous material as an overlay or laminate over a formed film. Representative topsheet structures of this variety are disclosed in Statutory Invention Registration H1670 published in the name of Aziz et al. on July 1, 1997, which describes nonwoven materials which overlay a formed film material; and in US Patent Application Serial No. 08/744,892, filed in the name of Sugahara on November 8, 1996 and published as WO 93/09744 on May 27, 1993, which describes a structure having a central region comprising a formed film and laterally outboard regions where a nonwoven material overlies the formed film; the disclosure of each of which is hereby incorporated herein by reference. In addition to transport through the formed film, webs of this variety also exhibit capillary fluid transport characteristics via the three-dimensional capillaries formed by inter-fiber spaces, likewise conducting fluid away from the wearer-contacting surface and toward the underlying absorbent structure. Such webs can exhibit an aesthetically-pleasing, cloth-like surface appearance and tactile impression due to the fibrous

nature of the surface. However, as will be recognized, such webs are much more expensive than a topsheet comprising a unitary material both because of the additional material used to produce the laminated web and the additional processing steps required for the production. Further, such webs may still be deficient in fluid handling because fluids can "hang up" in small inter fiber capillaries of the nonwoven portion so they remain near the body contacting surface.

The art has also attempted to provide fluid handling benefits of the three dimensional capillaries discussed above while reducing the plastic-like feel of such formed films using apertured (not formed) film that is bonded to an underlying nonwoven layer in a manner so as to provide a series of raised peaks that are separated by valleys. Such structures are described in US Patent 5,536,555, issued in the name of Zelazoski, et al. on July 16, 1996 and in PCT application Serial No. WO 97/02133, published in the name of Kimberly-Clark Corporation on January 23, 1997. While such structures may reduce the area of contact between the topsheet material and a wearer's body, a film material still contacts the wearer with the resulting plastic-like feel. Such materials also have the cost disadvantages of laminated materials discussed above.

US Patent 5,643,240, issued to Jackson, et al. on July 1, 1997 describes body side liners (topsheets) for absorbent articles that have a multi-layer structure with an apertured film layer superposed over a nonwoven web where the film layer and the nonwoven web have properties, such that when the layers are used in combination, an absorbent article using such a body side layer is said to have a good penetration rate and good rewet. However, when the claimed penetration rate and rewet values for the claimed absorbent article are compared to the values for the prior art absorbent article having a formed film topsheet that is described in the examples of the reference, the performance of the prior art article and the claimed article are very similar. Also, since the body contacting surface of the '240 patent is a formed film the body feel deficiencies of formed films discussed above would also be present.

Thus there is a continuing need for improved absorbent articles that combine improved fluid handling characteristics with improved body feel. As noted above, the desired characteristics of the topsheet and the absorbent core are related. For example, a core which exhibits a high capillary pressure capability will also have an increased tendency to drain fluids from the topsheet, thus assisting the topsheet in inhibiting rewet. Consequently, the design of an overall absorbent article may involve several tradeoffs in design considerations. For example, absorbent cores having high capillary pressure and topsheets having an improved balance of skin feel and fluid handling performance can be combined as described herein. In other words, by utilizing a core of the present invention and the topsheets of the present invention, absorbent articles having both improved skin feel and fluid handling properties are envisioned.

SUMMARY OF THE INVENTION

The present invention relates to absorbent articles such as sanitary napkins, panty liners, diapers, adult incontinence pads and briefs, and the like having an improved combination of skin feel and fluid handling properties, such as fluid acquisition and retention. Such improved properties are achieved by combining improved cores with improved topsheets. Particularly preferred embodiments of the present invention have a Drop Acquisition Time less than about 35 seconds, a Strikethrough Time less than about 55 seconds, a Wetback of less than 30 milligrams, and a panel softness score of between 30 and 60 PSU. These properties are provided by combining improved absorbent core structures with topsheet designs having improved skin feel and fluid handling properties.

In one preferred embodiment of the present invention, the improved cores comprise a multiplicity of hardwood pulp fibers, a multiplicity of softwood pulp fibers, and superabsorbent particles. Both fiber types and the superabsorbent particles are present in a substantially uniform admixture throughout the web which is an airlaid web structure. The hardwood pulp fibers may preferably comprise eucalyptus fibers, which eucalyptus fibers are preferably from about 10% to about 50% by weight of the web. The softwood pulp fibers may preferably comprise southern softwood kraft fibers, which fibers are preferably from about 20% to about 60% by weight of the web. Alternatively, the pulp fibers may also be combined with bicomponent thermoplastic fibers.

Preferred topsheets according to the present invention have improved skin feel with excellent fluid handling properties. The topsheets are fluid permeable but provide a barrier to rewet. The topsheets according to the present invention also preferably have a multiplicity of fibrils that project above the underlying surface of the topsheet material where the fibrils originate which produces a soft, velutinous surface.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a plan view of a preferred embodiment of an absorbent article in the form of a sanitary napkin which includes an absorbent core and topsheet according to the present invention.

Figure 2 is a cross-sectional view along line 2-2, of the preferred embodiment of the present invention shown in Figure 1.

Figure 3 is a cross-sectional view along line 3-3, of the preferred embodiment of the present invention shown in Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

The Absorbent Article

The present invention relates to absorbent articles having an improved combination of surface feel and fluid handling properties. The absorbent articles, such as sanitary napkins, diapers, adult incontinence pads and briefs, panty liners, and the like, as are described herein, generally comprise three basic structural components. One such component is a substantially liquid impervious backsheet. On top of this backsheet is disposed an absorbent core such as any of the structures of the present invention described herein. On top of this absorbent core and joined to the backsheet at least about the periphery of the absorbent article is a fluid pervious topsheet. Optionally, at least one acquisition component (also sometimes referred to as a fluid distribution layer), may be located between the topsheet and the absorbent core.

The present invention uses novel combinations of topsheets and absorbent cores to provide absorbent articles having the aforementioned improved combination of fluid handling and surface feel. Prior art absorbent articles have been able to provide either, but not both of these properties in one article. In particular, the absorbent articles of the present invention have rapid fluid acquisition (low strikethrough and drop acquisition times) and low rewet (low wetback amount) in combination with excellent softness. Example 1 below compares the fluid handling properties and softness of several embodiments of the present invention with exemplary prior art absorbent articles. These examples clearly demonstrate the improved performance of the absorbent articles of the present invention.

As noted above, the absorbent articles of the present invention generally provide rapid acquisition of bodily fluids that are deposited thereon. While fluid acquisition may be evaluated in many ways using a variety of test fluids, the methods for Drop Acquisition Time and Liquid Strike-Through Time, given in the ANALYTICAL METHODS section below, are believed to provide useful information about an absorbent article's ability to rapidly acquire bodily fluids. Both methods determine the time required for a sample to acquire a controlled volume of fluid that is rapidly deposited on the body surface of the sample. As such, a suitable absorbent article according to the present invention has a Drop Acquisition Time of less than about 35 seconds, preferably less than about 30 seconds, more preferably 25 seconds, still more preferably less than about 20 seconds, and most preferred less than about 15 seconds. Similarly, a suitable absorbent article according to the present invention will have a Liquid Strike-Through Time of less than about 60 seconds, preferably less than about 55 seconds, and more preferably less than about 50 seconds.

Absorbent articles according to the present invention also inhibit absorbed bodily fluids from moving from the interior of the absorbent article back to the body surface thereof when the absorbent article is exposed to forces due to wearer movement so as to minimize rewet. The

Wetback Test described in the ANALYTICAL METHODS section below is a laboratory measure of rewet. The test describes a method that determines the amount of absorbed test fluid that returns to the surface of a sample after it has absorbed a controlled amount of fluid and is then loaded with a controlled pressure. When evaluated according to this method a suitable absorbent article according to the present invention has a Wetback of less than about 40 milligrams, preferably less than 30 milligrams, more preferably less than 20 milligrams.

The absorbent articles of the present invention also have a desirable skin feel. While not being bound by theory, it is believed that the primary contributor to the skin feel of the absorbent articles of the present invention is the interaction between a wearer's skin and the body surface of the absorbent article. As is discussed in detail below, it is believed that the body surface has a soft, velutinous texture due to a multiplicity of fibrils that project above underlying structure of the topsheet material and a compressible, low density body-contacting surface.

While the present invention is suitable for all types of absorbent articles, including baby diapers and adult incontinence products, it will be illustrated in a particularly preferred embodiment, a catamenial pad, sanitary napkin 20, shown in Figure 1. As used herein, the term "sanitary napkin" refers to an absorbent article which is worn by females adjacent to the pudendal region, generally external to the urogenital region, and which is intended to absorb and contain menstrual fluids and other vaginal discharges from the wearer's body (e.g., blood, menses, and urine). Interlabial devices which reside partially within and partially external of the wearer's vestibule are also within the scope of this invention. As used herein, the term "pudendal" refers to the externally visible female genitalia. It should be understood, however, that the present invention is also applicable to other feminine hygiene or catamenial pads such as pantliners, or other absorbent articles such as incontinence pads, tampons, and the like.

Figure 1 is a plan view of the sanitary napkin 20 of the present invention in its flat-out state with portions of the structure being cut-away to more clearly show the construction of the sanitary napkin 20. The portion of the sanitary napkin 20 which faces or contacts the wearer 20A is oriented towards the viewer. As shown in Figure 1, the sanitary napkin 20 preferably comprises a liquid pervious topsheet 21, a liquid impervious backsheet 23 joined with the topsheet 21, and an absorbent core 25 of the present invention positioned between the topsheet 21 and the backsheet 23. The sanitary napkin 20 depicted in Figure 1 is a simplified absorbent article that could represent a sanitary napkin prior to its being placed on a wearer's undergarment. It should be understood, however, that the present invention is not limited to the particular type or configuration of sanitary napkin shown in Figure 1.

The sanitary napkin 20 has two surfaces, a body-contacting surface or "body surface" 20A and a garment surface. The sanitary napkin 20 is shown in Figure 1 as viewed from its body surface. The body surface is intended to be worn adjacent to the body of the wearer while the garment surface is on the opposite side and is intended to be placed adjacent to the wearer's undergarments when the sanitary napkin 20 is worn.

The sanitary napkin 20 has two centerlines, a longitudinal centerline "L" and a transverse centerline "T". The term "longitudinal", as used herein, refers to a line, axis or direction in the plane of the sanitary napkin 20 that is generally aligned with (e.g., approximately parallel to) a vertical plane which bisects a standing wearer into left and right body halves when the sanitary napkin 20 is worn. The terms "transverse" or "lateral" as used herein, are interchangeable, and refer to a line, axis or direction which lies within the plane of the sanitary napkin 20 that is generally perpendicular to the longitudinal direction.

Figure 1 also shows that the sanitary napkin 20 has a periphery 30 which is defined by the outer edges of the sanitary napkin 20 in which the longitudinal edges (or "side edges") are designated 26 and the end edges (or "ends") are designated 28. In the embodiment depicted in Figure 1, the sanitary napkin 20 is preferably symmetrical with respect to both the longitudinal and transverse centerlines although asymmetry about one of the centerlines is within the scope of the invention. Sanitary napkin 20 preferably includes side flaps or "wings" 34 that are folded around the crotch portion of the wearer's panties. The side flaps 34 can serve a number of purposes, including, but not limited to, protecting the wearer's panties from soiling and keeping the sanitary napkin secured to the wearer's panties. While the topsheet, the backsheet, and the absorbent core may be assembled in a variety of well known configurations (including so called "tube" products or side flap products), preferred sanitary napkin configurations are described generally in US Patent No. 4,950,264, issued to Osborn on Aug. 21, 1990; US Patent No. 4,425,130, issued to DesMarais on Jan. 10, 1984; US Patent No. 4,321,924, issued to Ahr on Mar. 30, 1982; US Patent No. 4,589,876, issued to Van Tilburg on Aug. 18, 1987.

Figure 1 shows a preferred embodiment of the sanitary napkin 20 in which the topsheet 21 and the backsheet 23 have length and width dimensions generally larger than those of the absorbent core 25. The topsheet 21 and the backsheet 23 extend beyond the edges of the absorbent core 25 to thereby form not only portions of the periphery but also side flaps. As best seen from Figure 1, the backsheet 23 and the topsheet 21 are positioned adjacent the garment surface and the body surface, respectively, of sanitary napkin 20 and are preferably joined to each other to form a perimeter 30. For example, the backsheet 23 and the topsheet 21 can be secured to each other by a uniform continuous layer of adhesive, a patterned layer of adhesive, or an array of

separate lines, spirals, or spots of adhesive. Adhesives that have been found to be satisfactory are manufactured by H. B. Fuller Company of St. Paul, MN under the designation HL-1258 or H-2031. Alternatively, topsheet 21 and backsheet 23 can be joined to each other by heat bonding, pressure bonding, ultrasonic bonding, dynamic mechanical bonding, or any other suitable method for joining topsheets and backsheets known in the art.

Figures 1-3 show the individual components of the main body portion 22 of the sanitary napkin 20 of the present invention. The main body portion 22 of the sanitary napkin comprises at least three primary components. These include a liquid pervious topsheet 38, a liquid impervious backsheet 40, and absorbent core 42 positioned between the topsheet 38 and the backsheet 40. Preferably, the main body portion 22 of the sanitary napkin 20 also comprises at least one optional acquisition component 44. The acquisition component 44 may either be a separate component positioned between the topsheet 38 and the absorbent core 42, or it may comprise part of a composite topsheet or part of the absorbent core 42.

The Topsheet

The topsheet 38 is a liquid pervious component that permits liquids (e.g., menses and/or urine) to readily penetrate through its thickness. The topsheet 38 is preferably compliant, soft feeling, and non-irritating to the wearer's skin. As noted above, preferred topsheets according to the present invention have both excellent skin feel and fluid handling properties

In preferred embodiments of the present invention, at least a portion of the body surface of the topsheet 38 is hydrophilic so that liquids will be transferred through the topsheet more readily. This diminishes the likelihood that bodily fluids will flow off the topsheet rather than flowing into and being absorbed by the absorbent core 42. The body surface of the topsheet 38 can be made hydrophilic by treating it with a surfactant. Suitable methods of treating a topsheet with a surfactant are described in US Patent 4,950,254 issued to Osborn and in US Patent 5,520,875, issued to Wnuk, et al. on May 28, 1996. Particularly preferred surfactant materials are described in copending, commonly assigned US Patent application Serial No. 09/287,986, filed in the name of Stone on April 8, 1999.

Preferred topsheets 38 according to the present invention achieve their desirable balance of skin feel and fluid handling properties by having means so bodily fluids that are deposited on the body surface 20A of sanitary napkin 20 rapidly pass through the topsheet 38 for absorption by the absorbent core 42. Such preferred topsheets also provide a barrier that inhibits such absorbed fluids from moving in the opposite direction when the sanitary napkin 20 is exposed to forces due to wearer movement so as to minimize rewet. The topsheet also has desirable skin feel properties

as are provided by a multiplicity of fibrils that project above the underlying structure of the topsheet material where the fibrils originate so as to provide a substantially uniform soft and silky skin feel.

A suitable topsheet 38 may be manufactured from a wide range of materials such as woven and nonwoven materials; polymeric materials such as apertured formed thermoplastic films, apertured plastic films, and hydroformed thermoplastic films; porous foams; reticulated foams; reticulated thermoplastic films; and thermoplastic scrims. Suitable woven and nonwoven materials can be comprised of synthetic fibers (e.g., polymeric fibers such as polyester, polypropylene, or polyethylene fibers). Such suitable topsheets may also be composite structures comprising both a formed thermoplastic film layer and a fibrous layer or two thermoplastic film layers that are subsequently formed.

As noted above, such preferred topsheets 38 are liquid permeable so as to provide rapid strikethrough of deposited bodily fluids for absorption by the core 42. One means of achieving rapid strikethrough is to provide a multiplicity of apertures through the topsheet. Such apertured topsheets are described in greater detail in the aforementioned US Patent application Serial No. 08/832,715, which describes formed films having microscopic spaced apart depositions of a low surface energy material thereon and in US Patent application Serial No. 09/217,736 filed in the names of Curro, et al. on December 21, 1998, which describes a laminate of an apertured nonwoven and a formed apertured thermoplastic film. Preferably, the body contacting surface is provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material. The depositions have a surface energy that is lower than the surface energy of the underlying polymeric substrate which creates a surface energy gradient between the depositions and the underlying substrate. This surface energy gradient exerts a force on fluid contacting the body contacting surface of the topsheet to direct to direct fluids away from the body contacting surface and through the topsheet for absorption by the core 42. Such surface depositions are described in greater detail in US Patent 6,025,049 issued in the names of Ouelette, et al. on February 15, 2000.

While a topsheet 38 may have rapid strikethrough (i.e. rapid movement of fluid from the body surface 20A of the sanitary napkin 20 to the core 42), it is also important for purposes of the present invention that a suitable topsheet 38 also inhibit rewet of such acquired fluids. As is well known, wearer movement applies forces to absorbent articles that can cause fluid movement from the core toward the body surface of the article which can cause the fluids to rewet the body surface. Rewet can be inhibited by providing a barrier to such reverse fluid flow toward the body surface. Such a barrier can have many forms. For example, the structures described in the

aforementioned US Patent 4,342,314 use capillary size to partially inhibit reverse fluid flow. In addition, the formed film webs disclosed therein are somewhat resistant to the shear forces caused by bodily movement and provide some separation between the body surface and the top of the absorbent core. Another means of inhibiting rewet is to provide a surface chemical barrier to reverse fluid flow. The surface energy gradients disclosed in the aforementioned US Patent 6,025,049 and in the aforementioned US Patent application Serial No. 08/832,715 are believed to provide such a surface chemical barrier to rewet.

In addition to the fluid handling properties discussed above the topsheets of the present invention have desirable skin feel. As noted above, it is believed that such desirable skin feel is due to the presence of a multiplicity of fibrils that project above the underlying surface of the topsheet material where the fibrils originate. Such fibrils produce a soft, velutinous surface which contacts the wearer's body and enhances the skin feel of the topsheet. Depending on the structure of the topsheet 38, such fibrils can comprise the microapertures discussed in the aforementioned US Patent 6,025,049 or the portion of the fibers of a nonwoven structure that may extend above the bulk of the structure.

This softness is readily perceivable by tactile evaluation. As can clearly be seen in Examples 1 and 2, when topsheets 38 according to the present invention are evaluated for softness using the Panel Softness method given in the ANALYTICAL METHODS section below, graders rate the topsheets 38 of the present invention very highly. Suitably, an absorbent article using a topsheet 38 according to the present invention has a softness rating of between about 30 panel score units (PSU) and about 60 PSU. Preferably, the softness rating is between about 35 PSU and about 60 PSU. More preferably, the softness is between about 40 PSU and about 60 PSU.

The fibrils provide a compressibility to the body surface 20A of the sanitary napkin 20 because they project above the underlying surface of the topsheet material. As will be recognized such compressibility depends both on the dimensions of the individual fibrils and the mechanical properties of the fibrils. The Thickness Under Load Test described in the ANALYTICAL METHODS section below evaluates both of these contributors to provide an overall response that relates to this aspect of body feel. As can be seen therein this method measures the force necessary to compress a sample by the approximate length of the fibrils. Thus, samples having a low compressibility value are believed to be particularly preferred because of their "cushy" feel. Exemplary compressibility data are given in Example 2 which compares topsheets according to the present invention with various prior art topsheets. Suitably, a topsheet according to the present

invention has a compressibility less than about 400 grams/cm³. Preferably, the compressibility is less than about 375 grams/cm³; more preferably, less than about 350 grams/cm³.

This compressibility is believed to be due to a region of the topsheet that is defined by the volume that lies between the underlying surface of the topsheet material and the distal ends of the fibrils. As will be recognized, because this region is occupied only by the material comprising the fibrils, the region has a low density. A method for determining this surface density is given in the Thickness Under Load method that is described in the ANALYTICAL METHODS section below. The reason the compressibility of this region is low is that the only material resisting compression is the material that comprises the fibrils. As compression continues so as to bring the fibrils into closer contact such that the density in the region begins to approach the density of the underlying topsheet material, the compressive force must, of necessity increase. It has been found that a material having a Surface Density that is less than about 0.035 grams/cubic centimeter has desirable softness. Preferably, the Surface Density is less than 0.03 about grams/cubic centimeter.

The fibrils that provide such desirable surface feel to topsheets according to the present invention can be provided using various means. Suitable means include: hydroforming as described in the aforementioned US Patent 4,629,643; body surfaces comprising a nonwoven material as disclosed in the aforementioned US Patent application Serial No. 08/832,715; napping and separation of softened polymeric material from a template as disclosed in PCT application Serial No. WO 99/06623 published in the name of Minnesota Mining and Manufacturing company on February 11, 1999; printing a hot melt material on the body surface as described in commonly assigned US Patent 5,763,044, issued to Ahr, et al on June 9, 1998; brushing; and other means as would be known to those having skill in the art.

Topsheets 38 having the particularly preferred combination of fluid handling and skin feel include: the formed thermoplastic film materials having a plurality of macroapertures and a multiplicity of microapertures wherein land area between the microapertures and the macroapertures is also provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material. Such a structure creates a surface energy gradient between the depositions and the underlying polymeric structure of the formed film as described in the aforementioned US Patent 6,025,049; the nonwoven materials having depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material as described in US Patent application Serial No. 08/832,715 filed in the names of Ouelette, et al. on April 11, 1997 and in US Patent 5,792,404, issued to Cree, et al. on August 11, 1998. The disclosure of each of which is incorporated herein by reference.

Other suitable materials for use as the topsheet 38 include the nonwoven materials provided with apertures according to US Patent, 5,628,097, issued in the name of Benson, et al. on May 13, 1997; the laminate of a nonwoven material and a formed apertured thermoplastic film, the nonwoven material having depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material as described in US Patent application Serial No. 08/761,905 filed in the name of Bien on December 5, 1996 and in the aforementioned US Patent application Serial No. 09/217,736; the permanently hydrophilic formed film materials described in US Patent application Serial No. 09/344,161, filed in the name of Lee, et al. on June 24, 1999; and in the textured, microapertured polymeric film webs that are described in US Patent application Serial No. _____ and the apertured polymeric webs having a multiplicity of three dimensional surface structures as described in US Patent application Serial No. _____, both filed in the name of Lee, et al. on April 7, 2000 (P&G Case Nos. 8011 and 8012 respectively; the Applicant will add the filing information when it is known). The disclosure of each of which is incorporated herein by reference.

The Backsheet

The backsheet 40 prevents the exudates absorbed and contained in the absorbent core 42 from wetting articles which contact the sanitary napkin 20 such as pants, pajamas and undergarments. The backsheet 40 is preferably resistant to the flow of liquids, and more preferably is impervious to liquids (e.g., menses and/or urine). The backsheet 40 is preferably manufactured from a flexible material. As used herein, the term "flexible" refers to materials which are compliant and will readily conform to the general shape and contours of the human body. The backsheet 40 may comprise a woven or nonwoven material, polymeric films such as thermoplastic films of polyethylene or polypropylene, or composite materials such as a film-coated nonwoven material. Preferably, the backsheet 40 is a polyethylene film having a thickness of from about 0.012 mm (0.5 mil) to about 0.051 mm (2.0 mils). The backsheet 40 may be embossed and/or matte finished to provide a more clothlike appearance. Further, the backsheet 40 may permit vapors to escape from the absorbent core 42 (i.e., breathable) while still preventing exudates from passing through the backsheet 40. A suitable backsheet material is obtained as product No. 18-1401 from the Clopay Corporation of Cincinnati, OH. A suitable breathable backsheet material is a laminate of an apertured film such as that described in US Patent 3,929,135 issued to Thompson which is inverted so that the smaller openings of the tapered capillaries face the absorbent core 42 which is adhesively laminated to a microporous film such as that described in Exxon's US Patent 4,777,073.

The Absorbent Core

The absorbent core 42 may be any absorbent means which is capable of absorbing and retaining liquids (e.g., menses and/or urine). A suitable core for purposes of the present invention has a high affinity for such liquids. Because of this high affinity, the absorbent core 42 is particularly effective in drawing such liquids from the topsheet 38 and in retaining such acquired liquids. Suitable structures for the core 42 have a high capillary pressure which allows the core 42 to effectively draw liquids that are deposited on the body surface 20A of sanitary napkin 20 through the topsheet 38 for storage. Suitable core structures also retain fluids well either because of a high capillary desorption pressure or because the core structure also comprises a superabsorbent material which can store acquired fluids by osmotic means.

As noted above, cores 42 of the present invention, because of their high capillary absorption pressure, can more fully dry the topsheet 38 than cores with a lower capillary absorption pressure. A method for measuring absorption pressure is provided in the ANALYTICAL METHODS section below. Because the cores 42 have a particularly high absorption pressure, they are very effective in acquiring fluids that are deposited on the topsheet 38. Suitably the mean absorption pressure is at least about 7 cm. Preferably, the mean absorption pressure is at least about 10 cm; more preferably, at least about 12 cm. Typically, the mean absorption pressure is between about 7 cm and about 25 cm. More typically, the mean absorption pressure is between about 10 cm and about 25 cm.

The absorbent core 42 may be manufactured in a wide variety of sizes and shapes (e.g., rectangular, oval, hourglass, dog bone, asymmetric, etc.). The configuration and construction of the absorbent core 42 may also be varied (e.g., the absorbent core may have varying caliper zones (e.g., profiled so as to be thicker in the center), or may comprise one or more layers or structures. The total absorbent capacity of the absorbent core should, however, be compatible with the design loading and the intended use of the sanitary napkin. Further, the size and absorbent capacity of the absorbent core may be varied to accommodate different uses such as incontinence pads, pantliners, regular sanitary napkins, or overnight sanitary napkins.

A wide variety of liquid-absorbent materials commonly used in sanitary napkins and other absorbent articles are suitable for manufacture of the absorbent core 42, such as blends comprising comminuted wood pulp which is generally referred to as airfelt. Examples of other suitable absorbent materials meltblown polymers including coform; chemically stiffened, modified or cross-linked cellulosic fibers; synthetic fibers such as crimped polyester fibers; peat moss; tissue including tissue wraps and tissue laminates; absorbent foams; absorbent sponges;

superabsorbent polymers; absorbent gelling materials; or any equivalent material or combinations of materials, or mixtures of these. The configuration and construction of the absorbent core may also be varied (e.g., the absorbent core may have varying caliper zones (e.g., profiled so as to be thicker in the center), hydrophilic gradients, superabsorbent gradients, or lower density and lower average basis weight acquisition zones; or may comprise one or more layers or structures).

A particularly preferred absorbent core 42 according to the present invention utilizes a combination of hardwood pulp fibers and softwood pulp fibers in an airlaid fibrous web. The incorporation of the hardwood fibers in the combinations described allows for increased capillary pressure and improved fluid distribution compared to absorbent webs without such fiber content. Additionally, by making the structure an airlaid structure, it is possible to incorporate superabsorbent particulate material throughout the core 42 and to achieve improved stiffness control over the resulting core as compared to the prior art. Consequently, the absorbent core 42 of the present invention is particularly well suited for use with the above-described topsheet materials due to its high capillary pressure, its high capacity through the use of superabsorbent material, and its high control over stiffness and other physical properties.

The particularly preferred absorbent core 42 of the present invention is an airlaid fibrous web comprising a substantially uniform admixture of hardwood pulp fibers and softwood pulp fibers. Preferably, the fibrous absorbent web also incorporates superabsorbent particles throughout the web. Additionally, the fibrous web layer may also incorporate synthetic fibers, such as bicomponent binder fibers, in the uniform admixture of fibers described above.

Unless otherwise noted, all composition percentages given below are expressed in terms of weights of the quantities being considered. Preferably, the fibrous absorbent web 40 of the present invention includes a ratio of softwood pulp fibers to hardwood pulp fibers in the range of from about 4:1 to about 1:2, more preferably from about 3:1 to about 1:1, most preferably about 2:1. A particularly preferred hardwood pulp fiber is a eucalyptus fiber. A particularly suitable eucalyptus fiber includes those of the eucalyptus grandis species. The hardwood pulp fibers, and eucalyptus in particular, have high surface area, thereby providing the absorbent web with a high capillary pressure. Too much hardwood pulp fiber, however, in the web will reduce its overall absorbent capacity. Additionally, the presence of excess hardwood pulp fiber may lower the fluid handling speed of the web to an unacceptably low level. Other suitable pulp fibers for use as a hardwood fiber in the absorbent core 42 of the present invention may include acacia, oak, maple, or cherry fibers.

The hardwood pulp fibers are blended in the absorbent core 42 with a multiplicity of softwood pulp fibers. The softwood pulp fibers are preferably blended into the structure in the ratios indicated above. A particularly preferred softwood pulp fiber is southern softwood kraft fibers. Other suitable softwood fibers include western and northern softwood kraft fibers.

The blend of hardwood pulp fibers and softwood pulp fibers provides a web with different sized fibers incorporated throughout. This provides a good distribution of fiber surface area and provides, in preferred embodiments, a high overall surface area. As noted above, the use of hardwood fibers involves tradeoffs between capillary pressure, and capacity and/or fluid handling speed. Because the cores 42 of the present invention are airlaid, they are readily amenable to the inclusion of a superabsorbent material. Such superabsorbent material will improve the overall capacity of the core 42, thereby advantageously combining high capacity and high capillary pressure.

The preferred absorbent core 42 of the present invention preferably also incorporates bicomponent binder fibers and/or superabsorbent particles. In more preferred embodiments, both the bicomponent fibers and the superabsorbent particles are present in the web and are blended in a substantially uniform mixture throughout the web thickness.

As will be recognized, the addition of bicomponent fibers allows for thermal bonding processes, such as through air bonding, bonding using heated rolls, ultrasonic bonding, and other means wherein a bonding material is melted. Such bonding also enables positive stiffness control of the overall layer. The stiffness of the web is controlled by adjusting the amount of bicomponent fiber as well as the time and temperature parameters of the thermal bonding process. Suitably, between about 5% and about 30% of the web is bicomponent fibers. In a particularly preferred embodiment, between about 15% and about 25% of the web is bicomponent fibers. A preferred fiber comprises a polyethylene/polypropylene fiber in which the polypropylene core is surrounded by a polyethylene sheath. Such a suitable 50%/50% concentric bicomponent fiber is available from Danaklon of Varde, Denmark.

Other binder materials may be included within the web structure as well. Polyethylene powder binders and/or latex binder material may be, but need not be, incorporated into the web structure. The use of a powder binder such as polyethylene allows the web to be a thermally bonded structure as is the case with the bicomponent binder fibers described above. If latex, or a similar binder is used, the latex will act as the binder and the structure may be described as "latex bonded."

While the foregoing discussion indicates how the components of the fibrous portion of the particularly preferred core structure interact to provide high capillary pressure, other components of the absorbent core 42 can also contribute to the performance thereof. Specifically, as noted above, the use of superabsorbent materials in the cores 42 of the present invention is preferred. An exemplary superabsorbent material is SAB 960, as is available from Stockhausen Louisiana Limited of Garyville, LA. Preferred superabsorbent particulate materials for use in the present invention have high permeability because and reduced gel blocking compared to commonly used superabsorbent materials. Exemplary preferred materials include surface crosslinked polyacrylates such as ASAP 2300 as is available from Chemdal, Corp. of Palatine, IL and the mixed bed materials described in copending, commonly assigned US Patent application Serial No. 09/258,890, filed in the names of Hird, et al. on March 1, 1999. The AGM particles preferably comprise from about 10% to about 50% of the absorbent core 42. A higher amount of such superabsorbent material increases the overall capacity of the absorbent core 42. Excess superabsorbent material, however, may reduce the permeability of the core 42 due to gel blocking or similar effects.

The fibrous absorbent web of the present invention may be made by any suitable airlaying technique known in the art. The use of airlaying allows the incorporate of particulate superabsorbent material throughout the structure, as well as greater positive control over the web physical properties than may be possible with other web forming techniques.

When the web incorporates bicomponent fibers, the web is preferably formed using a thermally bonded airlaid technique as described above. In such a construction, the use of additional binder material such as powder binder or latex is not required. Such additional materials may, nonetheless, be included in order to form a multi-bonded airlaid web. Additionally the web need not incorporate any bicomponent fiber, and may use latex in combination with the superabsorbent particles and hardwood and softwood pulp fibers as described above to form a latex bonded airlaid structure. Suitable methods of forming such airlaid structures are well known in the art. Another alternative includes the use of a powdered binder such as polyethylene together with a multiplicity of hardwood pulp and softwood pulp fibers to form a thermally bonded airlaid web.

U.S. Patent 5,445,777 describes a preferred method of adding a particulate superabsorbent material and/or a powdered binder material (such as the polyethylene binder described above) to a fibrous airlaid web. Such techniques are suitable for construction of the fibrous absorbent webs 40 of the present invention.

The airlaid structure of the present invention may be made with any suitable basis weight and density for the article in which is to be utilized. Suitably, the basis weight can be between about 60 g/m² and about 400 g/m² and the density can be between about 0.05 g/cc and about 0.2 g/cc. A preferred structure for use in a sanitary napkin may have a total basis weight of about 200 g/m², a preferred density of about 0.13 g/cc, and a caliper of about 1.5 mm.

For thicker products, the absorbent core 42 of the present invention may comprise a fluff of hardwood pulp fibers and softwood pulp fibers wherein the caliper and basis weight are tailored to meet the needs of users who desire such products. Optionally, a superabsorbent material may be incorporated homogeneously throughout the structure.

An alternative preferred material for the absorbent core 42 comprises polymeric foams formed from high internal phase emulsions (HIPE foams) as are described in US Patent 5,795,921 issued in the name of Dyer, et al. on August 18, 1998. Such foam materials can be produced so as to have a suitably small cell size so as to provide the high capillary absorption pressure that is discussed above, yet have sufficient openness to allow free movement of the insoluble components in blood-based fluids such as menses. These absorbent foams are made by polymerizing HIPEs where the volume to weight ratio of the water phase to the oil phase is in the range of from about 20:1 to about 125:1.

In addition to the absorbent materials described above, the absorbent core 42 may comprise other types of absorbent materials known in the art such as, creped cellulose wadding; meltblown polymers including coform; chemically stiffened, modified or cross-linked cellulosic fibers; synthetic fibers such as crimped polyester fibers; peat moss; tissue including tissue wraps and tissue laminates; absorbent foams; absorbent sponges; or any equivalent material or combinations of materials, or mixtures of these. Such additional materials can either be in the form of additional layers as are discussed below with respect to the acquisition component 44 or can comprise alternative preferred structures for the absorbent core 42.

While such alternative preferred structures must still meet the fluid handling requirements for the absorbent core 42 discussed above, the structures provide the designer of an absorbent article with additional design flexibility to meet performance requirements other than those discussed herein while still providing absorbent articles having the overall desirable fluid handling and skin feel of the absorbent articles of the present invention. Exemplary core structures that are also suitable for purposes of the present invention include an acquisition component that is pattern bonded to the topsheet so as to create an unbonded window which overlies an absorbent core comprising a multi-bonded air laid nonwoven material comprising

a blend of cellulose fibers, bi-component fibers, superabsorbent particles, and latex binder as is described in commonly assigned and copending US Patent Application Serial No. 09/074,909 filed on May 8, 1998, in the name of Daniels et al. and in International Patent Application Serial No. PCT/US96/20873, filed on December 20, 1996, in the name of Lynard et al., which application designates the United States; and the blends of chemically stiffened, twisted, and curled bulking fibers, high surface area fibers, and thermoplastic binding fibers as described in US Patent 5,549,589 issued the name of Horney et al on August 27, 1996. The disclosure of each of which is incorporated herein by reference. Absorbent cores 42 may also comprise blends or combinations of fibrous materials and HIPE foams wherein the foam is either in sheet or particulate form.

The acquisition component (or "acquisition layer" or "distribution layer") 44, if used, lies beneath the topsheet 38. The terms "layer" or "web", as used herein, include but are not limited to single unfolded sheets, folded sheets, strips of material, loose or bonded fibers, multiple layers or laminates of material, or other combinations of such materials. These two terms are thus, not limited to single unfolded layers or sheets of material. The acquisition component 44 may provide void volume beneath the topsheet 38 to increase the ability of the sanitary napkin to draw liquids through the topsheet 38. In the preferred embodiment described herein, the acquisition component 44 preferably provides resiliency to lateral compressive forces so that the sanitary napkin 20 has improved resistance to bunching.

The acquisition layer serves to quickly collect and temporarily hold discharged bodily fluids, as well as facilitating transport of the fluid from the point of initial fluid contact to other parts of the acquisition layer and the absorbent core. There are several reasons why the improved transport of exudates is important, including providing a more even distribution of the exudates throughout the absorbent core and allowing the sanitary napkin 20 to be made relatively thin. The transport referred to herein may encompass the transportation of liquids in one, two or all directions (i.e., in the x-y plane and/or in the z-direction). The acquisition layer may be comprised of several different materials including nonwoven or woven webs of synthetic fibers including polyester, polypropylene, or polyethylene, natural fibers including cotton or cellulose, blends of such fibers, or any equivalent materials or combinations of materials. Examples of sanitary napkins having an acquisition layer and a topsheet are more fully described in US Patent No. 4,950,264 issued to Osborn, US Patent application Ser. No. 07/810,774, Dec. 17, 1991 filed in the names of Cree, et al. and published as PCT application Serial No. WO 93/117,725 on June 24, 1993, and the aforementioned International Patent Application Serial No. PCT/US96/20873. The disclosure of each of these references is incorporated herein by

reference. In a preferred embodiment, the acquisition layer may be joined with the topsheet by any of the conventional means for joining webs together, most preferably by fusion bonds as is more fully described in the above-referenced Cree application.

The acquisition component 44 should be liquid permeable. The acquisition component 44 is also preferably compliant, soft feeling, and non-irritating to the user's skin. The acquisition component 44 has a body-facing face (or side), and a garment-facing face. The acquisition component 44 may be of any suitable size and shape. In the embodiment shown in Figure 1, the acquisition component 44 is in the shape of a race track with slightly concave side edges, as is the portion of the topsheet 38 that overlies the main body portion 22 of the sanitary napkin 20. The dimensions of the acquisition component 44, however, are preferably not as large as those of the topsheet 38.

The acquisition component 44 can be made from any materials suitable for the above purposes that are capable of having the topsheet 38 fused to them. The acquisition component 44 may, for example, be comprised of woven or nonwoven materials. The fibers or other components of these materials may be synthetic, or partially synthetic and partially natural. Suitable synthetic fibers include polyester, polypropylene, polyethylene, nylon, viscous rayon, or cellulose acetate fibers. Suitable natural fibers include cotton, cellulose, or other natural fibers. The acquisition component 44 may also be at least partially comprised of cross-linked cellulose fibers. The acquisition component 44, if nonwoven, can be made by a number of different processes. These include, but are not limited to: air laid, wet laid, meltblown, spunbonded, carded, thermally bonded, air-through bonded, powder bonded, latex bonded, solvent bonded, spunlaced, and combinations of the foregoing.

The acquisition component 44 may be constructed in the manner described in the aforementioned US Patent 5,549,589 with respect to the distribution layer described therein. Another preferred construction for the acquisition component 44 is a laminate of two nonwoven materials. The uppermost layer of this laminate (or "secondary topsheet") 46 preferably comprises an 19 g/yd² (22.5 g/m²) spunbonded polypropylene nonwoven material referred to as product No. 065MLPV60U (or "P-9") obtained from Fiberweb, North America of Washougal, WA. The underlying layer of the laminate (or "tertiary topsheet") 48 preferably comprises a multi-bonded air laid nonwoven material that is thermally bonded using powder bonding and latex bonding. In a preferred embodiment, this multi-bonded air laid nonwoven material comprises about 77% cellulose fibers, about 20% powder binder, and about 3% latex binder (1.5% sprayed on each side of the web) and has a basis weight of about 50 g/yd² (about 60 g/m²). (Unless otherwise stated, all percentages herein are by weight.) Such a multi-bonded air laid nonwoven is preferably obtained

as product No. 90830X312 from Merfin Hygienic Products, Ltd. of Delta, British Columbia, Canada. These two nonwoven layers are preferably laminated together by depositing the multi-bonded air laid nonwoven material on the spunbonded polypropylene nonwoven material. The spunbonded material is used as a process aid or carrier web in the process of forming this laminate.

In alternative embodiments, the spunbonded polypropylene nonwoven material may have a greater or a lower basis weight, or it may be replaced by an air laid tissue, a wet laid tissue, or any of the materials described above. If a wet laid tissue is used instead of a polypropylene nonwoven material, the orientation of the laminate is preferably reversed so that in the finished product, the multi-bonded air laid nonwoven material lies above the wet laid tissue layer. In the case of thicker sanitary napkins, any of the acquisition components described above can be used. Additionally, in one preferred thicker sanitary napkin embodiment, a low density latex bonded air laid material can be used as the entire acquisition component (that is, no tertiary topsheet is required). A low density latex bonded air laid material suitable for this purpose is a material having a basis weight of about 80 g/m² known as product No. FG413MHB, which is obtained from Walkisoft, USA of Mt. Holly, NC.

The topsheet 38 described herein is preferably fused to the acquisition component 44 or to the absorbent core 42, or to both. A suitable manner for fusing (or integrating) the topsheet to underlying components at discrete sites is described in the aforementioned US Patent Application Serial No. 09/074,909. As described in the above-referenced applications, the bonding of the topsheet to underlying layers is preferably done at discrete locations and the center of the article is provided with an "un-bonded window."

Assembly of the Sanitary Napkin

The topsheet 38, the acquisition component 44, if included, the backsheet 40, and the absorbent core 42 may be assembled in a variety of configurations known in the art (including layered or "sandwich" configurations and wrapped or "tube" configurations). Figures 1 and 2 show a preferred embodiment of the sanitary napkin 20 assembled in a sandwich construction. In Figures 1-3, the topsheet 38 and the backsheet 40 have length and width dimensions generally larger than those of the absorbent core 42. The topsheet 38 and the backsheet 40 extend beyond the edges of the absorbent core 42 to form portions of the periphery 30. The garment-facing side of the topsheet 38 is preferably joined to the body-facing side of the acquisition component 44 as described above. The acquisition component 44 may be joined to the absorbent core 42, if desired. If these components are joined, they can be joined in any of the manners described herein

for joining the topsheet 38 to the acquisition component 44. However, in the embodiment shown in the drawings, the acquisition component 44 is not directly joined to the absorbent core 42. The backsheet 40 is preferably joined to the garment-facing side of the absorbent core by adhesives.

The portions of the topsheet 38 and backsheet 40 that extend beyond the edges of the absorbent core 42 and the acquisition component 44 are preferably also joined to each other. These portions of the topsheet 38 and backsheet 40 can be joined in any suitable manner known in the art. The term "joined", as used in this specification, encompasses configurations in which an element is directly secured to another element by affixing the element directly to the other element; configurations in which the element is indirectly secured to the other element by affixing the element to intermediate member(s) which in turn are affixed to the other element; and configurations in which one element is integral with another element, i.e., one element is essentially part of the other element. Preferably, in the embodiment shown, these portions of the topsheet 38 and backsheet 40 are joined using adhesives over substantially the entire portions that extend beyond the edges of the absorbent core 42 and a crimp seal at the end edges 28 of the main body portion where the topsheet 38 and backsheet 40 are densified by the application of pressure or heat and pressure.

Exemplary Absorbent Article Structure

One particularly preferred embodiment of the present invention comprises a topsheet according to the aforementioned US Patent 6,025,049 and the particularly preferred core described above. The performance of this particularly preferred structure is shown as Sample 2 in Table 1 below. As can be seen in the data presented in Table 1, this particularly preferred embodiment has a very desirable balance of fluid handling properties and softness.

In particular, the topsheet 38 of this particularly preferred embodiment comprises a formed thermoplastic film having a plurality of macroapertures that allow fluids contacting the body surface of the topsheet 38 to pass therethrough and a multiplicity of microapertures that extend upward and form the body contacting surface 20A when the formed film is used as a topsheet. The land area between the microapertures and the macroapertures is also provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material. There is a surface energy gradient between the depositions and the underlying polymeric structure of the particularly preferred topsheet 38 that creates a force which encourages bodily fluids deposited on the body surface 20A to move to the macroapertures and therethrough for absorption by the core 42.

This preferred embodiment also comprises an acquisition component 44 which underlies the topsheet 38 as described above. A acquisition component 44 comprises secondary topsheet 46 of spunbonded polypropylene nonwoven material and a tertiary topsheet 48 of a multi-bonded air laid nonwoven material that is thermally bonded using powder bonding and latex bonding as is described above and in the aforementioned US Patent 5,549,589.

The core 42 for this preferred embodiment is described in detail above and in greater detail in commonly assigned, copending US Patent Application serial No. 60/128,352, filed in the name of Noel, et al on April 8, 1999. As noted above, these preferred structures for core 42 comprise blends of hardwood and softwood fibers that provide high capillary pressure and superabsorbent polymers that provide a high osmotic storage capability.

The preferred components discussed above, along with a liquid impervious backsheet 40 as may be known to the art are assembled into a preferred embodiment of the sanitary napkin 20 of the present invention according to the configuration discussed in the Assembly of the Sanitary Napkin section above

Optional Components

Flaps

The sanitary napkin 20 shown in Figures 1-2, as discussed above, preferably comprises an optional pair of flaps 24 that are joined to the main body portion 22. The flaps 24 extend laterally outward beyond the longitudinal side edges 26 of the main body portion 22 from their proximal edges 60 to their distal edges (or "free end") 62. The flaps 24 extend outward from at least the central region 36 of the main body portion 22. As shown in Figure 1, each flap 24 is divided into a front half 64, and a back half 66 by a flap transverse centerline T_1 . The flap transverse centerline T_1 may coincide with the principal transverse centerline T of the sanitary napkin, but this is not absolutely required.

The flaps 24 can be joined to the main body portion 22 in any suitable manner. Preferably, in the embodiment shown in Figures 1-3, the flaps 24 are integral with the main body portion 22 (that is, the flaps 24 comprise integral extensions of the topsheet 38 and backsheet 40). In other alternative embodiments, the flaps 24 can comprise separate components that are joined to the main body portion 22. The flaps 24 are each joined to (or associated with) main body portion 22 along a juncture. This is typically a longitudinally-oriented (or "longitudinal") juncture, such as lines of juncture 68. As used herein, the terms "junction" (or "line of juncture") refer to regions where the flaps 24 extend from or are joined to the main body portion 22. The line of juncture 68

in the embodiment illustrated in the drawings can be considered to be defined by concave inwardly-oriented regions or lines.

The flaps 24 can be in any suitable configuration. Suitable flaps are described in Reexamined Patent No. B1 4,589,876, issued to Van Tilburg, Certificate of Reexamination issued April 27, 1993; US Patent 4,687,478, which issued to Van Tilburg on August 18, 1987; US Patent 5,389,094 issued to Lavash, et al. on February 14, 1995; US Patent 5,558,663 issued to Weinberger, et al. on September 24, 1996 (which describes an alternative to flaps that are applied by the wearer); and in International Patent Application Serial No. PCT US 96/15957 filed on October 3, 1996, in the name of Lash, et al. Other preferred features for the flaps 24 including a deformed region that forms a hinge and zones of extensibility or zones of differential extensibility are described in US Patent Application Serial No. 09/074,909 filed on May 8, 1998, in the name of Daniels et al. and International Patent Application Serial No. PCT/US96/2087, filed on December 20, 1996, in the name of Lynard et al., which application designates the United States.

Attachment Means

The garment surface 20B of the sanitary napkin 20 may include, and preferably does include, fasteners for attaching the sanitary napkin to the wearer's undergarment. Figure 3 shows the central pad fastener 82 which is adapted to secure the main body portion 22 of the sanitary napkin to the crotch region of an undergarment. Any types of fasteners known in the art, such as adhesive fasteners and mechanical fasteners can be used. Fasteners comprising adhesives have been found to work well for this purpose, with pressure-sensitive adhesives being preferred. In a preferred embodiment, the central pad fastener 82 comprises a pair of spaced apart longitudinally-oriented strips or zones of adhesive that are centered about the longitudinal centerline L.

The outer surface of the flaps 24, adjacent the distal edges 62 of the flaps, is preferably provided with a flap adhesive 84. The flap adhesive 84 is used to assist in maintaining the flaps 24 in position after they are wrapped around the edge of the crotch portion of the panty. Suitable adhesive fasteners are described in greater detail in US Patent 4,917,697. The flaps 24 can be maintained in position by attaching the flaps 24 to the undergarment, or to the opposing flap.

The fasteners used with the present invention are not limited to adhesive attachment means. Any type of fastener used in the art can be used for such purpose. For example, the sanitary napkin 20 could be secured to the wearer's undergarment by mechanical fasteners, such as VELCRO, or the fasteners described in US Patent 4,946,527 issued to Battrell on August 7, 1990, or US Patent 5,392,498 issued to Goulait, et al. on February 28, 1995. For simplicity, however, the fasteners will be described in terms of adhesive attachment means.

The adhesive attachment means are respectively covered by removable release liners, central pad release liner and flap release liner, both designated 86. The pressure-sensitive adhesives should be covered with release liners 86 to keep the adhesives from sticking to extraneous surfaces prior to use. Suitable release liners are described in US Patent 4,917,697. A particularly preferred release liner which also serves as an individual package for wrapping the sanitary napkin is described in US Patent 4,556,146 issued to Swanson, et al.

The sanitary napkin 20 of the present invention is utilized by removing the release liners 86 and placing the sanitary napkin 20 in a panty. The main body portion 22 is placed in the crotch portion of the panty with one end of the main body portion 22 extending towards the front section of the panty and the other end towards the back section of the panty. The backsheet 40 is placed in contact with the inner surface of the center of the crotch portion of the panty. The central pad adhesive fastener 82 maintains main body portion 22 in position. The distal portions of the flaps 24 are folded around the side edges of the panty. The flap adhesives 84 secure the flaps 24 to the underside of the panty or to the opposing flap.

EXAMPLES

Example 1.

This example compares fluid handling and softness, as evaluated according to the methods given in the ANALYTICAL METHODS section below, of various embodiments of a sanitary napkin form of the present invention with exemplary prior art sanitary napkins and commercially available sanitary napkins that are believed to represent best in class of the prior art.

Table 1

<u>Sample No.</u>	<u>Strikethrough</u> (Seconds)	<u>Wetback</u> (Milligrams)	<u>Drop Acquisition</u> (Seconds)	<u>Softness</u> (PSU)
1	43	45	3	34
2	47	9	5	35
3	10	5	5	37
4	13	5	6	8
5	95	11	25	31
6	55	11	6	9
7	195	330	0.2	49
8	33	749	18	49
9	38	8	8	8
10	134	19	0.2	22

26

11	11	4	0.3	5
12	49	43	49	41
13	63	6	52	36
14	60	46	3	38
15	55	28	0.6	36
16	64	83	47	26
17	71	30	0.5	23

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
21

<u>Sample No.</u>	<u>Sample Description</u>
1	Prior Art: topsheet according to US Patent 6,025,049, core according to application Serial No. 09/074,909
2	Present invention: topsheet according to US Patent 6,025,049, particularly preferred core described above
3	Present invention: topsheet according to US Patent 6,025,049, thick, airfelt core
4	Prior art: topsheet according to US Patent 4,342,314, thick, airfelt core
5	Present invention: topsheet according to application Serial No. 09/217,736, particularly preferred core described above
6	Prior art: topsheet according to US Patent 4,342,314, core according to application Serial No. 09/074,909
7	Prior art: A thin sanitary napkin available in Japan from Kao Mfg. Co. as Laurier Softmesh Ultra
8	Prior art: A thick sanitary napkin available in Japan from Kao Mfg. Co. as Laurier Softmesh Slim
9	Prior art: A thin sanitary napkin available in Japan from UniCharm as Sofy Sara
10	Prior art: A thin sanitary napkin available from Personal Products Co. of Skillman, NJ as Stayfree Ultra Thin
11	Prior art: A thick sanitary as available in Venezuela from Johnson & Johnson de Venezuela as Stayfree Alas Normal Malla Siempre Seca
12	Prior art: A thin sanitary napkin as available in Germany from Kimberly-Clark GmbH as Kotex Camelia
13	Prior art: A thin sanitary napkin as is available in Korea from elleair as elis
14	Present Invention: Permanently hydrophilic topsheet according to the aforementioned US Patent application Serial No. _____ (P&G Case 8012 Applicant will add application Serial

No. when known) having a core according to described
in US Patent 5,795,921

- 15 Present Invention: Formed film polyethylene topsheet according to the
aforementioned US Patent application Serial No. _____
(P&G Case 8012 Applicant will add application Serial
No. when known) having a core according to described in
US Patent 5,795,921

- 16 Prior Art: Hydrophobic nonwoven topsheet available from Corovin GmbH of
Penne, Germany as Corolind and apertured so as to have a basis
weight of 20 grams/m² according US Patent 5,628,097,

Sample No.

Sample Description

- 17 Prior Art: Surfactant treated hydrophobic nonwoven topsheet available from
Corovin GmbH of Penne, Germany as Corolind and apertured so
as to have a basis weight of 20 grams/m² according US Patent
5,628,097

Example 2

This example compares the softness-related properties of topsheets according to the present
invention and according to the prior art.

Table 2

<u>Sample No.</u>	<u>Softness</u> (PSU)	<u>Compressibility</u> (g/cubic cm)	<u>Surface Density</u> (g/cubic cm)
1	32	325	0.027
2	4	549	0.037
3	43	581	0.072
4	46	226	0.018
5	—	714	0.050
6	—	592	0.073
7	—	653	0.150
8	—	488	0.058
9	—	205	0.037
10	47	339	—

11	33	430	—
12	48	939	—
13	—	250	—
14	41	350	—

<u>Sample No.</u>	<u>Sample Description</u>
1	Topsheet according to US Patent 6,025,049
2	Topsheet according to US Patent 4,342,314
3	Topsheet according to application Serial No. 09/217,736
4	A nonwoven used as a topsheet on the thin sanitary napkin available in Japan from Kao Mfg. Co. as Laurier Softmesh Ultra
5	A formed film used as a topsheet on the thin sanitary napkin available in Japan from UniCharm. as Sofy Sara
6	A nonwoven used as a topsheet on the thin sanitary napkin available from Personal Products Co. of Skillman, NJ as Stayfree Ultra Thin

<u>Sample No.</u>	<u>Sample Description</u>
7	A formed film used as a topsheet on the thick sanitary napkin as available in Venezuela from Johnson & Johnson de Venezuela as Stayfree Alas Normal Malla Siempre Seca
8	A nonwoven used as a topsheet on the thin sanitary napkin as available in Germany from Kimberly-Clark GmbH as Kotex Camelia
9	A nonwoven used as a topsheet on the thin sanitary napkin as is available in Japan from elleair as elis
10	A formed film polyethylene topsheet according to the aforementioned US Patent application Serial No. _____ (P&G Case 8012 Applicant will add application Serial No. when known)
11	A formed film topsheet according to US Patent 4,629,643
12	A hydrophobic nonwoven nonwoven as is available from Corovin GmbH of Penne, Germany as Corolind that is apertured according US Patent 5,628,097 so as to have a basis weight of 20 grams/m ²

- 13 A permanently hydrophilic formed film topsheet according to the
aforementioned US Patent application Serial No. _____ (P&G Case 8012
Applicant will add application Serial No. when known)
- 14 A permanently hydrophilic textured, formed film according to the
aforementioned US Patent application Serial No. _____ (P&G Case 8011
Applicant will add application Serial No. when known)

ANALYTICAL METHODS

Drop Acquisition Time

- 1) Place a topsheet sample, approximately 18 cm x 28 cm, over one layer of BOUNTY towel
(available from Procter & Gamble of Cincinnati, OH) on a flat surface. Place a clear Lexan®
plate, 15 cm long by 20 cm wide by 1 cm thick, with eighteen 1.9 cm ($\frac{3}{4}$ ") holes drilled 2.5
cm apart in 3 rows of six holes each, on top of the topsheet sample. The pressure exerted on
the sample by this plate is ~0.02 psi(0.14 kPa), ensuring intimate contact between the
topsheet and the Bounty towel.
Alternatively, if complete products are to be evaluated, the plate is not used. Instead, eighteen
drops (see Step 2) are applied to the product sample in a pattern wherein: six drops are
applied adjacent the intersection of the longitudinal and lateral centerlines of the product;
three drops are applied adjacent each end adjacent the longitudinal centerline; and three drops
are applied adjacent each side, adjacent the lateral centerline.
- 2) Deliver a 45 microliter drop of sheep blood from a pipette (A 100 microliter capacity
Eppendorf Air Displacement Pipette has been found to be satisfactory) onto the surface of the
sample within one of the holes in the plate. The pipette tip should be approximately 3–5 mm
above the topsheet surface, and the drops should be applied in such a manner that the force
exerted by delivery from the pipette is minimized.
- 3) Start timing acquisition as soon as the drop contacts the sample.
- 4) Stop timing when the top surface plane of the sample again becomes visible as a result of the
drop passing into or through the sample. Record this drop acquisition time.
- 5) If the acquisition time exceeds 60 seconds, record the result as 61 seconds.
- 6) Repeat steps 1 through 5 an additional seventeen times through the remaining holes in the
Lexan plate so as to provide eighteen measurements per sample.
- 7) Repeat steps 1 through 6 on two more topsheet samples.

- 8) Calculate the mean drop acquisition time, using 61 seconds for those drops which did not pass into or through the sample within 60 seconds.

Liquid Strike-Through Time

- 5 This test method measures the strike-through time, i.e. the time required for a known volume of liquid applied to the body surface of a topsheet material or absorbent article, which is in fluid contact with an underlying absorbent, to pass through the sample. The method used herein is described in European Disposables and Nonwovens Association (Brussels, Belgium) standard method number 150.3-96 with the following differences:

<u>Test Condition</u>	<u>EDANA Method 150.3-96</u>	<u>Method of Present Invention</u>
Environmental Temperature	20±2°C	22±1°C
Relative Humidity	65±2%	50±2%
Test Fluid	Synthetic Urine	Sheep's Blood
Underlying Absorbent	Filter Paper	Finished Absorbent Article
Confining Pressure	500g/(12.5cm) ² (~0.3 kPa)	0.25 psi (1.7 kPa)
Volume of Fluid to Acquire	5ml, one insult	10 ml, one insult

Wetback

10 Wetback is a test designed to measure the amount of liquid which emerges from an absorbent structure through a topsheet to cause wetness on the surface of the topsheet. The method used herein is described in European Disposables and Nonwovens Association (Brussels,

Belgium) standard method number 151.1-96 with the following differences:

<u>Test Condition</u>	<u>EDANA Method 151.1-96</u>	<u>Method of Present Invention</u>
Environmental Temperature	20±2°C	22±1°C
Environmental Relative Humidity	65±2%	50±2%
Filter Paper Type	ERT FF3	Ahlstrom (Mt. Holly Springs, PA) #632
Number of Pieces of Filter Paper	5	7
Confining Pressure	4000g/(10cm) ² (~3.9 kPa)	0.77 psi (5.2 kPa)
Test Fluid	Synthetic Urine	Sheep's Blood
Fluid Loading	3.3 times wt of filter paper	7.5 ml
Exposure Time:		
Distribution	3 Minutes Under Load	15 Minutes
Rewet	2 Minutes	15 Seconds
	<u>Panel Softness</u>	

Overview

A trained panel of graders is used to compare the tactile softness of a series of test products or topsheet materials.

Graders

Graders are all female and are selected and trained for ability to discriminate small differences in tactile softness. As part of this training, each grader identifies a "dominate" (i.e. most sensitive) hand which is used in all evaluations. Graders are monitored on a study to study basis and retrained as needed to minimize drift with time.

Apparatus

Sensory Box While a room designed for sensory evaluations having features such as, grader separation from other graders, barrier between sample and panelist which allows sample access through slit, and other features as are known to the art is preferred, the sensory box described hereafter has been found to be suitable for softness evaluations. A 33 cm X 43 cm (face) X 20 cm (deep) rectangular box having an open back for sample presentation and a front opening screened by a black curtain (the curtain is in 2 portions each about 21 centimeters wide and separated in the middle to allow easy grader access).

Felt A 23 cm X 18 cm felt is used as a substrate when topsheet-only samples are graded. A suitable material is 54 Polyester felt, Rainbow Classic, Royal Blue as is available from Kunin Felt of Hampton, NH.

Method

- 1) The panel moderator introduces the first sample into the sensory box. Up to six test samples may be evaluated in any one test period. Two control samples, one with a relatively high softness reading (a hydroformed film made according to the aforementioned US Patent 4,629,643 ~35) and one with a relatively low softness reading (a formed film made according to the aforementioned US Patent 4,342,314 ~5) are used in each series. Samples are presented to each grader in a random order. When topsheet-only samples are evaluated, the sample is first spread smoothly on the surface of the felt before presentation to the grader. Each sample is only graded one time.
- 2) The grader grades each sample using a 60 point scale for softness where, for softness, 0 is identified as not soft at all and 60 is identified as very soft/fluffy. The grader uses the finger tips of the first three fingers of her dominant hand to determine a softness grade for the sample (the fingers are arched so only the tips contact the sample). The control samples are used to maintain consistency between tests. The grade for each sample is recorded by marking the grade on a linear scale on the sample data sheet.
- 3) Steps 1 and 2 are repeated for a minimum of 12 graders.

Report

Report the mean and standard deviation for each sample tested, including the control samples. Known methods of determining statistically significant differences (e. g. analysis of variance, Newman-Keuls Multiple Range Test, etc.) may be used.

Thickness Under Load

Overview:

This test procedure determines material thickness as a function of applied load. Data generated using this procedure can be used to calculate compressibility and surface density as functions of applied load.

Scope:

This procedure applies to materials from 0.2 mm to 5 mm thick. Samples tested by this procedure should be flat and not have significant curvature. Top and bottom surfaces of the material should be essentially parallel.

Sampling:

Samples should be cut such that they are larger than the 25.4 mm diameter platen used to compress the sample. A rectangular cutting die 3.81 cm by 6.99 cm is suitable. The area to be tested must be able to lie flat. Samples may be cut from individual materials or finished products but the cut area must be free from wrinkles or curvature and the sampling procedure should not distort the dimensions of the material. For example, when sampling finished products, the sample material must be cleanly separable from other materials. At least three different samples should be measured with the average result reported.

Apparatus:

Use a constant rate of extension (CRE) tester. A suitable CRE tester is the Instron Model 5564, available from the Instron Corporation, Canton, MA. The CRE tester must have accurate control and measurement of crosshead position to 0.01mm. The CRE tester must be able to measure load accuracy to 0.5 gram force (5 mN). The CRE tester should have less than 0.02 mm compliance at 1N applied load. The moving crosshead should be fitted with a 25.4 mm diameter (5.07 cm² area) circular, flat platen disk, rigidly attached to the load cell. A circular, flat platen at least 100 mm in diameter should be rigidly fixed to the lower stationary clamp. The faces should be parallel with each other with a tolerance of 0.02 mm or less.

Procedure:

1. The grammage of the topsheet sample should be determined by weighing a precisely known area of 100 cm² or larger on an analytical balance to the nearest 0.0002 g.
2. With the parallel platens a known distance apart, the flat sample is placed on the lower platen. For a 1.00 mm thick sample, 3.00 mm is the recommended starting separation. The CRE load cell should be zeroed at the start of each test while the platens are not contacting the sample.
3. The CRE tester lowers the upper platen toward the sample at a rate of 2.54 mm per minute, recording at least 100 data points per mm of travel, until the sample is compressed and a load of 500 grams is reached.

4. The thickness of the material at any given load is determined by the position of the upper platen. Thickness should be measured at a load of 5 grams force and 50 g force, corresponding to 100 Pa and 1000 Pa pressure on the sample.

Calculations:

- 5 Compressibility is determined by calculating the secant slope of the stress/strain compression curve between 5g and 50g and dividing this slope by the area compressed. Units for compressibility are grams per cm^3 . This slope is calculated by dividing the change in load by the change in thickness. For example, if a material was 1.00 mm thick under a 5g load and compressed to 0.70 mm thick under a 50 g load:

$$\frac{50\text{g}-5\text{g}}{1.00\text{ mm} - 0.70\text{ mm}} = 150\text{ g/mm} \quad \text{Compression Slope}$$

$$\text{Compressibility} = (150\text{ g/mm}) (10\text{mm/cm}) (1/5.07\text{ cm}^2) = 296\text{ g/cm}^3$$

Similarly, surface density at a given load is calculated by dividing the grammage (grams material per square centimeter) by the thickness under the load of interest.

$$\text{Surface Density at X load} = \frac{\text{grammage}}{\text{thickness under X load}}$$

for example, the surface density of a material that has a grammage of 0.00325 grams/ cm^2 and a thickness of 0.065 cm at an applied pressure of 100 Pascals is:

$$\frac{0.00325\text{ grams/cm}^2}{0.065\text{ cm}} = 0.0500\text{ g/cm}^3$$

Mean Absorption Pressure

This test measures the height at which the amount of fluid absorbed or desorbed is equal to one half the amount absorbed at a height of 0 centimeters (free absorbent capacity). The method for Capillary Sorption as described in US Patent Application Serial No. 09/258,889 entitled

- 25 Absorbent Members comprising a High Surface Area Material for Absorbing Body fluids which was filed in the name of Young, et al. on March 1, 1999, was used with the following differences.
- 1) The initial suction height is 50 centimeters instead of 200 centimeters.
 - 2) The test is conducted at ambient laboratory conditions instead of controlled temperature and relative humidity.
 - 30 3) The glass frit 202 is not jacketed.

- 4) The reservoir 206 and the balance 207 are not enclosed.
- 5) Cylinder 266 and piston 288 are not equilibrated at 31°C.
- 6) An occlusive film is used instead of an apertured film to minimize evaporation.
- 7) The set up height is 50 centimeters.
- 5 8) There is no evaporation loss correction.
- 9) The mean capillary absorption pressure is determined from the absorption isotherm as the height where the sample uptake is equal to one half the sample uptake at a height of 0 centimeters.

10 The disclosures of all patents, patent applications (and any patents which issue thereon, as well as any corresponding published foreign patent applications), and publications mentioned throughout this patent application are hereby incorporated by reference herein. It is expressly not admitted, however, that any of the documents incorporated by reference herein teach or disclose the present invention. It is also expressly not admitted that any of the commercially available materials or products described herein teach or disclose the present invention.

15 While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention.

What is claimed is:

1. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a compressibility of less than about 488 g/cubic cm;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said topsheet and said core cooperate to provide said absorbent article with a liquid strikethrough of less than about 55 seconds and a wetback of less than 30 milligrams.

2. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a compressibility of less than about 488 g/cubic cm;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

3. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet,;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said absorbent article has a panel softness between about 30 and about 60 PSU and said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

4. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet, wherein said topsheet has a Surface Density of less than about 0.035 grams per cubic centimeter;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;

wherein said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

5. An absorbent article, said absorbent article having a body surface and a garment surface and comprising:

a liquid permeable topsheet, said topsheet providing a barrier which inhibits rewet;

a liquid impermeable backsheet disposed beneath said topsheet and joined thereto at least about a periphery of said absorbent article; and

an absorbent core disposed between said topsheet and said backsheet, said absorbent core having a high internal surface area which creates a high capillary pressure to enhance absorption of bodily fluids deposited onto said body surface;




wherein said topsheet has a panel softness between about 30 and about 60 PSU and said topsheet and said core cooperate to provide said absorbent article with a drop acquisition time of less than about 30 seconds and a wetback of less than 30 milligrams.

6. An absorbent article according to any of Claims 1 to 5 wherein said at least a portion of said absorbent core has a mean absorption pressure of greater than about 7 cm.

7. An absorbent article according to Claim 6 wherein said absorbent core has a mean absorption pressure between about 7 cm and about 25 cm.
8. An absorbent article according to any of the above claims wherein said topsheet comprises a formed thermoplastic film materials having a plurality of macroapertures and a multiplicity of microapertures wherein land area between the microapertures and the macroapertures is also provided with a plurality of microscopic, discontinuous, spaced regions that comprise depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the formed film.
9. An absorbent article according to any of Claims 1 to 7 wherein said topsheet comprises a nonwoven materials having depositions of a low surface energy material that create a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
10. An absorbent article according to any of Claims 1 to 7 wherein said topsheet comprises a laminate of a nonwoven material and a formed apertured thermoplastic film, the nonwoven material having depositions of a low surface energy material on the surface thereof that is opposite to the surface joined to the thermoplastic film for forming the laminate, wherein the low surface energy material creates a surface energy gradient between the depositions and the underlying polymeric structure of the nonwoven material.
11. An absorbent article according to any of the above claims wherein said absorbent core comprises a polymeric foam formed from a high internal phase emulsion.
12. An absorbent article according to any of Claims 1 to 10 wherein said absorbent core comprises a blend of chemically stiffened, twisted, and curled bulking fibers, high surface area fibers, and thermoplastic binding fibers.
13. An absorbent article according to any of Claims 1 to 10 wherein said absorbent core comprises an airlaid fibrous web comprising a substantially uniform admixture of hardwood fibers and softwood fibers.
14. An absorbent article according to Claims 12 or 13 wherein said core further comprises superabsorbent particles.
15. An absorbent article according to any of the above claims wherein said absorbent article further comprises an acquisition component that is pattern bonded to said topsheet so as to create an unbonded window, wherein said acquisition component is disposed between said

topsheet and said absorbent core and said absorbent core comprises a multi-bonded air laid nonwoven material comprising a blend of cellulose fibers, bi-component fibers, superabsorbent particles, and latex binder.

topsheet and said absorbent core and said absorbent core comprises a multi-bonded air laid nonwoven material comprising a blend of cellulose fibers, bi-component fibers, superabsorbent particles, and latex binder.

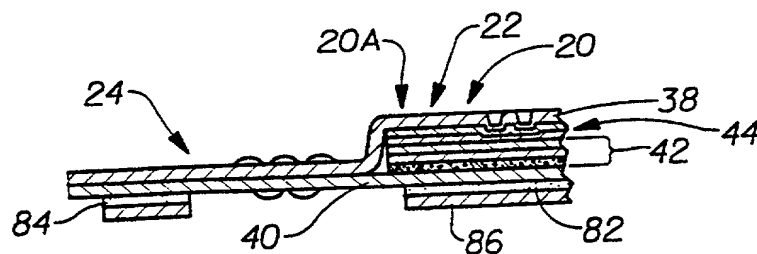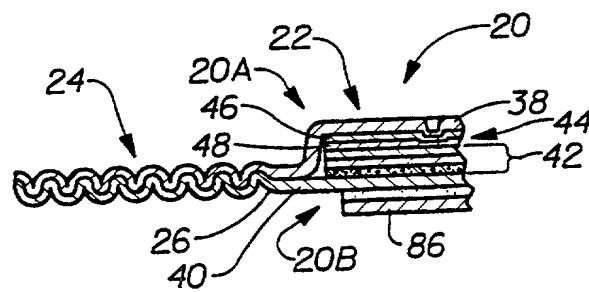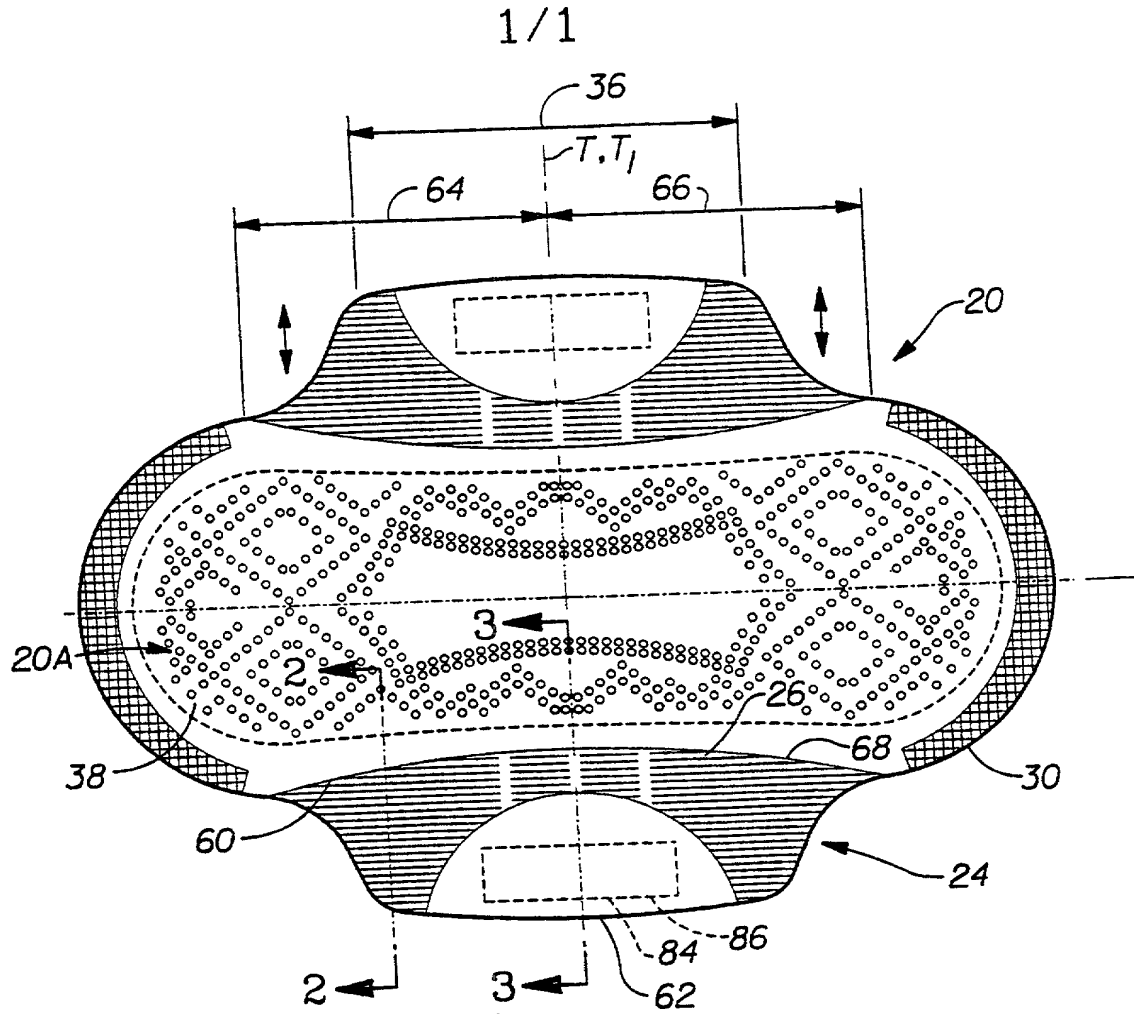

DECLARATION COMBINED WITH POWER OF ATTORNEY

Page 1 of 2

Attorney Docket No. 7502M

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ABSORBENT ARTICLE WITH IMPROVED COMBINATION OF SKIN FEEL AND FLUID HANDLING the specification of which

(check one) ☐ is attached hereto.
☒ was filed on April 7, 2000 as
 Application Serial No. PCT/US/00/09411
 and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐
Yes☐
No

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

60/128,267April 8, 1999Application Serial No.Filing DateApplication Serial No.Filing Date

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37 Code of Federal Regulations §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status) (patented, pending, abandoned)

I hereby appoint the following as my attorney(s) or agent(s) with full power of substitution to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Atty Name	Atty Reg Number.	Associate Power of Attorney Attached
Mary Catherine Hentz	<u>37,556</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Edward J. Milbrada	<u>40,090</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Kirsten K. Stone	<u>42,129</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Caroline Wei-Berk	<u>45,203</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Steven W. Miller	<u>31,984</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
E. Kelly Linman	<u>26,759</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Jacobus C. Rasser	<u>37,043</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
T. David Reed	<u>32,931</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Timothy B. Guffey	<u>41,048</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Emelyn L. Hiland	<u>41,501</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Donald E. Hasse	<u>29,387</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Eileen L. Hughett	<u>34,352</u>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Edward J. Milbrada

The Procter & Gamble Company

(513) 634-6971

Name

Phone No.

Winton Hill Technical Center, 6300 Center Hill Avenue

Cincinnati, Ohio 45224

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the U.S. National Phase Entry
Under 35 USC 371 from
International Application of
the International Application of
WALKER, Richard III
Int'l Application No. PCT/US00/09411
Filed in the RO/US on 07 April 2000

Entitled:	Absorbent Article With Improved Combination of Skin Feel and Fluid Handling
-----------	--

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner for Patents
Box PCT
Washington, D.C. 20231

Dear Sir:


5
You are requested to recognize K. C. Johnson (Registration No. 35,558), M.
P. Fitzpatrick (Registration No. 41,751), I. N. Hickman (Registration No. 46,770),
T. P. Cummings (Registration No. 40,973), and K. K. Stone (Registration No. 42,129)
of The Procter & Gamble Company, Cincinnati, Ohio, as Associate Attorneys to
prosecute this application, to make alterations and amendments therein, and to transact
all business in the Patent Office connected with the application or with the patent
granted thereupon.

Please address all future communications to:

T. P. Cummings, Patent Agent
Customer Number 27749

Respectfully submitted for Applicants,

By


T. David Reed
Agent for Applicant
Registration No. 32,931

Cincinnati, Ohio
29 August 2001
(513) 627-7025/FAX 627-6333

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00
Full name of sole or first joint inventor Richard (NMN) Walker

Inventor's signature Richard Walker

May 17, 2000
Date

Residence 3251 Lamarc Trail, Cincinnati, Ohio 45241 OH,

Citizenship U.S.A.

Post Office Address 3251 Lamarc Trail, Cincinnati, Ohio 45241

2-00
Full name of second joint inventor, if any Margaret Henderson Hasse

Inventor's signature Margaret Henderson Hasse

5/18/00
Date

Residence 501 Reily Road, Wyoming, Ohio 45215 OH,

Citizenship U.S.A.

Post Office Address 501 Reily Road, Wyoming, Ohio 45215

3-00
Full name of third joint inventor, if any Peter David Ventura

Inventor's signature Peter David Ventura

5/19/00
Date

Residence 3809 Forest Avenue, Norwood, Ohio 45212 OH,

Citizenship U.S.A.

Post Office Address 3809 Forest Avenue, Norwood, Ohio 45212

4-00
Full name of fourth joint inventor, if any William Robert Ouellette

Inventor's signature William Robert Ouellette

5/23/2000
Date

Residence 11987 Blackhawk Circle, Cincinnati, OH 45240 OH

Citizenship U.S.A.

Post Office Address 11987 Blackhawk Circle, Cincinnati, OH 45240

5-00
Full name of fifth joint inventor, if any Yann-Per Lee

Inventor's signature Yann-Per Lee

5/23/00
Date

Residence 6386 Kings Arms Way, Fairfield, Ohio 45014 OH,

Citizenship Taiwan, R.O.C.

Post Office Address 6386 Kings Arms Way, Fairfield, Ohio 45014

6-00
Full name of sixth joint inventor, if any John Richard Noel

Inventor's signature John Richard Noel

5/23/00
Date

Residence 8767 Apalachee Drive, Cincinnati, Ohio 45249 OH.

Citizenship U.S.

Post Office Address 8767 Apalachee Drive, Cincinnati, Ohio 45249